



ITEM NO: 508100DIP



Areas of application:


> General outdoor illumination

Features:

- Aluminum Casing
- > Ultra-light and easy to install
- > High efficiency up to 86%
- High reliability
- ➤ Wide input Voltage 200 ~ 240Vac
- ➤ Ambient Temperature (Ta) (-20~50°c)
- Protection Characteristics:
 - Overload Protection: 110% ∼150% of rated load.
 - Short Circuit Protection: Protection Type: Hiccup mode, Auto-recovery

CAPTION THE VALUE Rated Power 100W Rated Output Voltage 24V 0~4.2A **Output Current** Typical Efficiency 86% Rated Lifetime 15000 h **Ambient Temperature** -20~50°c Setup and Rise Time 1.5S, 20mS@230Vac Dimension W51 L257 H30 mm Yes Dimming

DIMMING OPERATION

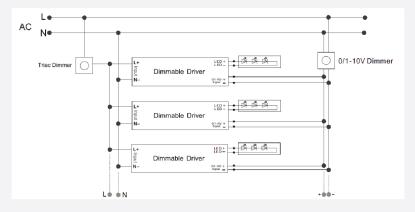





















Suggested Installation Areas





