

# LED 60\*60 PANEL LIGHT

## Data Sheet

**NEWPOWER®**

# ITEM NO: 101055


## LED 60\*60 PANEL LIGHT

CAPTION	THE VALUE
Rated wattage	40 W
Rated current	1.2 mA
Rated Voltage	100-240V
Power Factor	50/60 Hz
Displacement Factor	0.9
Rated lumens	4000 Lm
Efficiency	100 Lm/w
Lumen Maintenance	6000h
Beam Angle	120°
Color temperature	4000 K
Consistency sdcn	<6
CRI	>80
Rated Lifetime	25000 h
Switch cycle	15000
Ta	-10~45°C
Cutout	60*60
Height	595 mm
weight	1700 g
Dimming	No
Main color of the luminaire	White




### Areas of application:

- > Hospitals
- > Offices
- > Banks
- > Floodlight for high buildings
- > Streets, city squares, stations

### INSTRUCTIONS

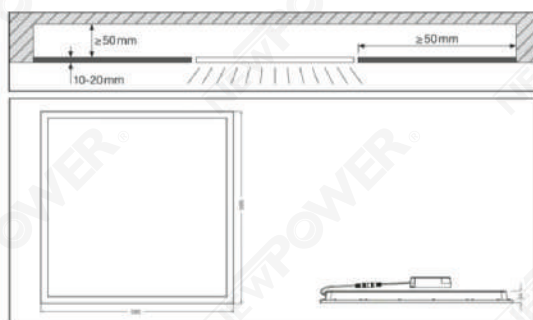

### LIGHT DISTRIBUTION GRAPH



LED's shown inside frame

1. Energy Savings
2. Eco-Friendly
3. High Brightness
4. Flexible Features
5. Lights Up Instantly
6. Less Heat Dissipation
7. Shock-Resistant

