


# ITEM NO: 106067



## LED FLOOD LIGHT DOB 100 W



CAPTION	THE VALUE
Rated wattage	100 W
Rated current	38 mA
Rated Voltage	220-240V
Power Factor	50/60 Hz
Displacement Factor	0.9
Rated lumens	10200 Lm
Efficiency	102 Lm/w
Lumen Maintenance	6000h
Beam Angle	110°
Color temperature	4000 K
Consistency sdcm	<6
CRI	>80
Rated Lifetime	30000 h
Switch cycle	15000
Ta	-20~45°C
Length	295 mm
Width	38 mm
Height	200 mm
weight	1.2 kg
Dimming	No
Main color of the luminaire	GREY

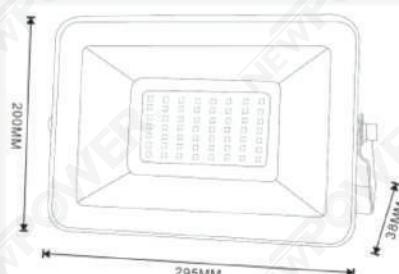

Photometric curve

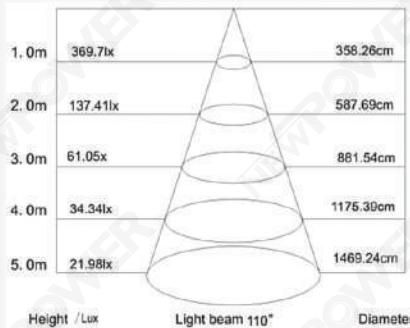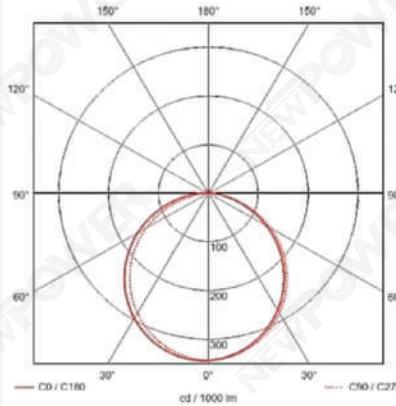

### Super protection:

► It is made of very safe materials, so it is environmentally friendly. Provides flexibility in installation and ease of installation.

### Product benefits:

► LED design for high product reliability  
► Reduced windage area thanks to slim design  
► Frosted cover made of tempered glass for uniform illumination  
► Dust and water protection according to IP65

### Product features:

► Architectural lighting  
► Landscape lighting  
► Billboard lighting  
► Industrial and storage facilities

