


# ITEM NO: 106071



## LED FLOOD LIGHT DOB 200 W



CAPTION	THE VALUE
Rated wattage	200 W
Rated current	38 mA
Rated Voltage	220-240V
Power Factor	50/60 Hz
Displacement Factor	0.9
Rated lumens	20400 Lm
Efficiency	102 Lm/w
Lumen Maintenance	6000h
Beam Angle	110°
Color temperature	6500 K
Consistency sdcm	<6
CRI	>80
Rated Lifetime	30000 h
Switch cycle	15000
Ta	-20~45°C
Length	375 mm
Width	45 mm
Height	260 mm
weight	1.8 kg
Dimming	No
Main color of the luminaire	GREY

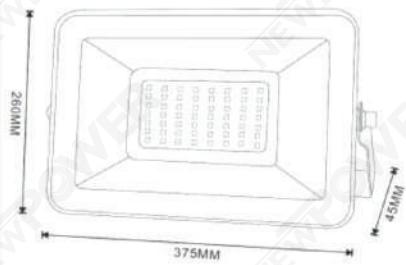

### Photometric curve

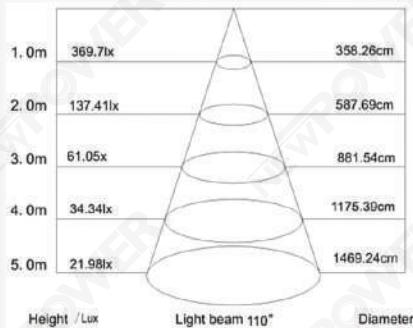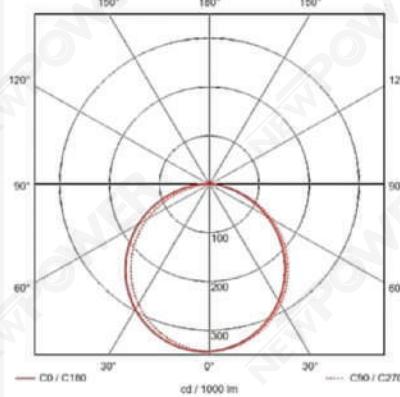

### Super protection:

► It is made of very safe materials, so it is environmentally friendly. Provides flexibility in installation and ease of installation.

### Product benefits:

- LED design for high product reliability
- Reduced windage area thanks to slim design
- Frosted cover made of tempered glass for uniform illumination
- Dust and water protection according to IP65

### Product features:

- Architectural lighting
- Landscape lighting
- Billboard lighting
- Industrial and storage facilities



Apartment



Supermarket



Retail Store



Office



Hotel



School



Hospital