

# LED FLOOD LIGHT

## Data Sheet

**NEWPOWER®**


# ITEM NO: 106073

## LED FLOOD LIGHT DOB



### 200 W



| CAPTION                     | THE VALUE |
|-----------------------------|-----------|
| Rated wattage               | 200 W     |
| Rated current               | 38 mA     |
| Rated Voltage               | 220-240V  |
| Power Factor                | 50/60 Hz  |
| Displacement Factor         | 0.9       |
| Rated lumens                | 20400 Lm  |
| Efficiency                  | 102 Lm/w  |
| Lumen Maintenance           | 6000h     |
| Beam Angle                  | 110°      |
| Color temperature           | 4000 K    |
| Consistency sdcn            | <6        |
| CRI                         | >80       |
| Rated Lifetime              | 30000 h   |
| Switch cycle                | 15000     |
| Ta                          | -20~45°C  |
| Length                      | 375 mm    |
| Width                       | 45 mm     |
| Height                      | 260 mm    |
| weight                      | 1.8 kg    |
| Dimming                     | No        |
| Main color of the luminaire | GREY      |

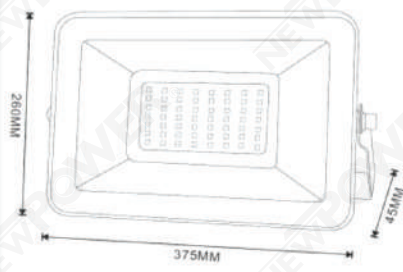

**Photometric curve**

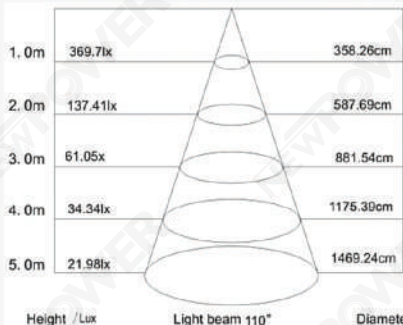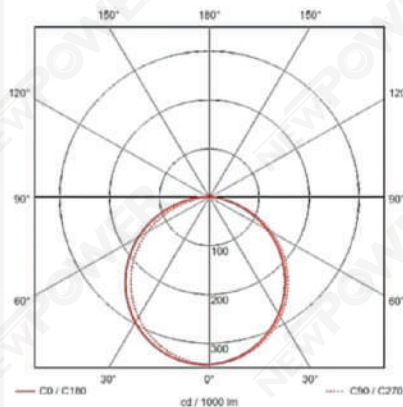

### Super protection:

> It is made of very safe materials, so it is environmentally friendly Provides flexibility in installation and ease of installation.

### Product benefits:

- > LED design for high product reliability
- > Reduced windage area thanks to slim design
- > Frosted cover made of tempered glass for uniform illumination
- > Dust and water protection according to IP65

### Product features:

- > Architectural lighting
- > Landscape lighting
- > Billboard lighting
- > Industrial and storage facilities

