LINEAR LIGHT
Data Sheet

NEWPOWER®

ITEM NO: 107322

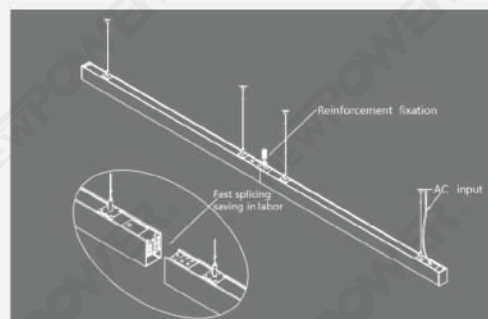## LINEAR LIGHT SMD BLACK 40 W 120CM LIFUD DRIVER WITH CCT SWITCH CONNECTABLE

1. Energy Savings
2. Eco-Friendly
3. High Brightness
4. Flexible Features
5. Lights Up Instantly
6. Less Heat Dissipation
7. Shock-Resistant
8. LED Ship

CAPTION	THE VALUE
Rated wattage	40 W
Rated current	0.167 mA
Rated Voltage	220-240V
Power Factor	50/60 Hz
Displacement Factor	0.9
Rated lumens	4400 Lm
Efficiency	110 Lm/w
Lumen Maintenance	6000h
Beam Angle	120°
Color temperature	6500K,4000K,3000K
Consistency sdcm	<6
CRI	>90
Rated Lifetime	50000 h
Switch cycle	25000
Ta	-10~40°c
Length	1200 mm
Width	75 mm
Height	50 mm
weight	700 g
Dimming	No
Main color of the luminaire	Black

Areas of application:
> General indoor illumination
> Decorative illumination
> Private living areas

LED Linear Light

Multi-colored lighting

Accessories

L SHAPE 9W-15CM WITH CCT SWITCH

T SHAPE 9W BLACK 4000K-6500K

X SHAPE 9W BLACK 4000K-6500K

CRI >90 | RoSH | PF >0.9 | IP 40 | Ta -10~40°c

Apartment | Supermarket | Retail Store | Office | Hotel | School | Hospital

Suggested Installation Areas