

DOWN LIGHT HYBRID

Data Sheet

NEWPOWER®

ITEM NO: 103050

RECESSED HYBRID DOWN LIGHT

30 W



CAPTION	THE VALUE
Rated wattage	30 W
Rated current	0.050 A
Rated Voltage	220-240V
Power Factor	50/60 Hz
Displacement Factor	0.9
Rated lumens	2400 Lm
Efficiency	80 Lm/w
Lumen Maintenance	6000h
Beam Angle	120°
Color temperature	3000 k
Consistency sdcn	<3
CRI	>80
Rated Lifetime	20000 h
Switch cycle	15000
Ta	40 °c
Cutout	200 mm
Width	250 mm
Height	52.5 mm
weight	470 g
Dimming	No
Main color of the luminaire	White

Areas of application:


- > General indoor illumination
- > Decorative illumination
- > Private living areas

Super protection:

- > It is made of very safe materials, so it is environmentally friendly
- Provides flexibility in installation and ease of installation.

1. Energy Savings
2. Eco-Friendly
3. High Brightness
4. Flexible Features
5. Lights Up Instantly
6. Less Heat Dissipation
7. Shock-Resistant

LIGHT DISTRIBUTION CURVE

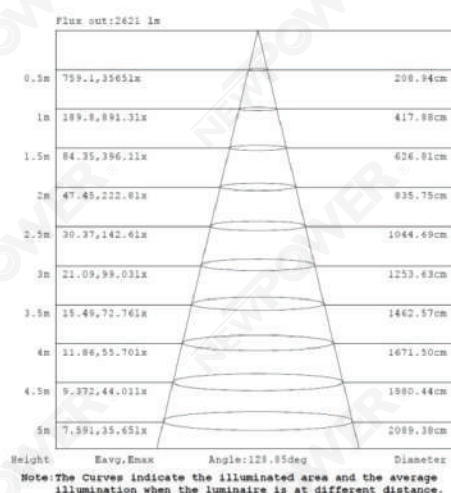

CRI >80 RoSH PF >0.9 IP 44 Ta 40°C

Apartment Supermarket Retail Store Office Hotel School Hospital