

ITEM NO: 103054

SURFACE HYBRID DOWN LIGHT

30 W



CAPTION	THE VALUE
Rated wattage	30 W
Rated current	0.2 A
Rated Voltage	220-240V
Power Factor	50/60 Hz
Displacement Factor	0.9
Rated lumens	2400 Lm
Efficiency	80 Lm/w
Lumen Maintenance	6000h
Beam Angle	120°
Color temperature	4000 k
Consistency sdcm	<6
CRI	>80
Rated Lifetime	20000 h
Switch cycle	15000
Ta	-20~45°C
Cutout	NA
Width	230*55 mm
Height	225 mm
weight	0.5 kg
Dimming	No
Main color of the luminaire	White & Black

Areas of application:


- General indoor illumination
- Decorative illumination
- Private living areas

Super protection:

- It is made of very safe materials, so it is environmentally friendly
- Provides flexibility in installation and ease of installation.

1. Energy Savings
2. Eco-Friendly
3. High Brightness
4. Flexible Features
5. Lights Up Instantly
6. Less Heat Dissipation
7. Shock-Resistant

LIGHT DISTRIBUTION CURVE

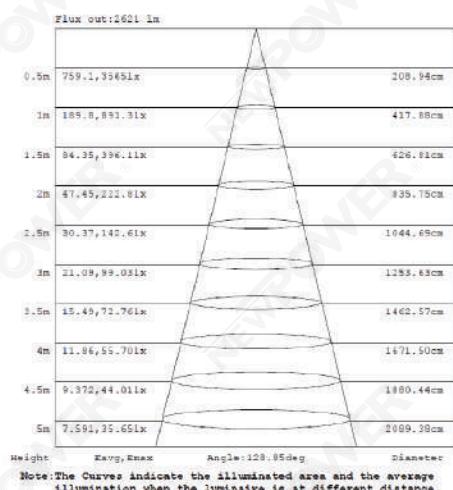

Apartment

Supermarket

Retail Store

Office

Hotel

School

Hospital